

Schäfer + Peters GmbH
Competence in Stainless Steel



Now
A2/A4 also in
Ø 3,0/4,0/4,5/5,0
and 10,0
available



PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT
ITEM 9250 A2 + A4 TX



ITEM 9250 A2 TX PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT


USES:

Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components

A minimum screw-in depth of 4x the diameter must be ensured. A screw-in depth of 8x the diameter should ideally be achieved. More than 12x the diameter must not be included in calculations.

FEATURES:

- Pan washer head timber screws
- cutting point
- Anti-Friction-coating
- TX drive

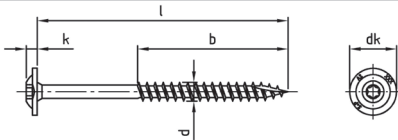

d	3	4	4,5	5
l/mm	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.
20	9250230 20	9250240 20	9250245 20	
25	9250230 25/18	9250240 25/18	9250245 25/18	9250250 25/18
30	9250230 30/18	9250240 30/18	9250245 30/18	9250250 30/20
35	9250230 35/24	9250240 35/24	9250245 35/24	9250250 35/24
40	9250230 40/24	9250240 40/24	9250245 40/24	9250250 40/24
45	9250230 45/30	9250240 45/30	9250245 45/30	9250250 45/30
50	9250230 50/30	9250240 50/30	9250245 50/30	9250250 50/30
55		9250240 55/36	9250245 55/36	9250250 55/36
60		9250240 60/36	9250245 60/36	9250250 60/36
65		9250240 65/36	9250245 65/36	9250250 65/36
70		9250240 70/42	9250245 70/42	9250250 70/42
80		9250240 80/48	9250245 80/48	9250250 80/48
90			9250245 90/54	9250250 90/54
100			9250245 100/60	9250250 100/60
110				
120				9250250 120/70
130				
140				
150				
160				
170				
180				
190				
200				
220				
225				
240				
250				
260				
280				
300				
320				
325				
340				
350				
360				
380				
400				

	200	200	200	200 ≥ 60 100
k	2,2	3	3,2	3,5
dk	9	12	13	14
Drive	TX10	TX20	TX20	TX25



ITEM 9250 A2 TX PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT


USES:

Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components

A minimum screw-in depth of 4x the diameter must be ensured. A screw-in depth of 8x the diameter should ideally be achieved. More than 12x the diameter must not be included in calculations.

FEATURES:

- Pan washer head timber screws
- cutting point
- Anti-Friction-coating
- TX drive

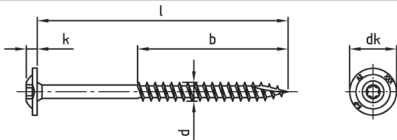

d	6	8	10
l/mm	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.
20			
25			
30	9250260 30/20	9250280 30	
35	9250260 35/24		
40	9250260 40/24	9250280 40	
45	9250260 45/30		
50	9250260 50/30	9250280 50	
55	9250260 55/36		
60	9250260 60/36	9250280 60/50	92502100 60/50
65	9250260 65/36		
70	9250260 70/42	9250280 70/50	92502100 70/55
80	9250260 80/48	9250280 80/72	92502100 80/55
90	9250260 90/54	9250280 90/80	92502100 90/55
100	9250260 100/70	9250280 100/80	92502100 100/55
110	9250260 110/70	9250280 110/80	92502100 110/80
120	9250260 120/70	9250280 120/80	92502100 120/80
130	9250260 130/70	9250280 130/80	92502100 130/80
140	9250260 140/70	9250280 140/80	92502100 140/80
150	9250260 150/70	9250280 150/80	92502100 150/80
160	9250260 160/70	9250280 160/80	92502100 160/80
170	9250260 170/70	9250280 170/80	92502100 170/80
180	9250260 180/70	9250280 180/80	92502100 180/105
190	9250260 190/70	9250280 190/80	92502100 190/105
200	9250260 200/70	9250280 200/80	92502100 200/105
220	9250260 220/70	9250280 220/80	92502100 220/105
225		9250280 225/80	
240	9250260 240/70	9250280 240/80	92502100 240/105
250		9250280 250/80	92502100 250/105
260	9250260 260/70	9250280 260/80	92502100 260/105
280	9250260 280/70	9250280 280/80	92502100 280/105
300	9250260 300/70	9250280 300/80	92502100 300/105
320		9250280 320/80	92502100 320/105
325		9250280 325/80	
340		9250280 340/80	92502100 340/105
350		9250280 350/80	92502100 350/105
360		9250280 360/80	92502100 360/105
380		9250280 380/80	92502100 380/105
400		9250280 400/80	92502100 400/105

	100 ≥ 200 50	100 ≥ 120 50	100 ≥ 120 50
k	3,8	4,6	5
dk	15	20	25
Drive	TX25	TX40	TX40



ITEM 9250 A4 TX PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT


USES:

Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components

A minimum screw-in depth of 4x the diameter must be ensured. A screw-in depth of 8x the diameter should ideally be achieved. More than 12x the diameter must not be included in calculations.

FEATURES:

- Pan washer head timber screws
- cutting point
- Anti-Friction-coating
- TX drive

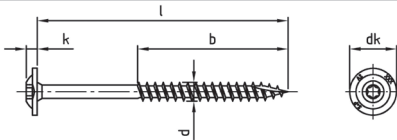

d	3	4	4,5	5
l/mm	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.
20	9250430 20	9250440 20	9250445 20	
25	9250430 25/18	9250440 25/18	9250445 25/18	9250450 25/18
30	9250430 30/18	9250440 30/18	9250445 30/18	9250450 30/20
35	9250430 35/24	9250440 35/24	9250445 35/24	9250450 35/24
40	9250430 40/24	9250440 40/24	9250445 40/24	9250450 40/24
45	9250430 45/30	9250440 45/30	9250445 45/30	9250450 45/30
50	9250430 50/30	9250440 50/30	9250445 50/30	9250450 50/30
55		9250440 55/36	9250445 55/36	9250450 55/36
60		9250440 60/36	9250445 60/36	9250450 60/36
65		9250440 65/36	9250445 65/36	9250450 65/36
70		9250440 70/42	9250445 70/42	9250450 70/42
80		9250440 80/48	9250445 80/48	9250450 80/48
90			9250445 90/54	9250450 90/54
100			9250445 100/60	9250450 100/60
110				
120				9250450 120/70
130				
140				
150				
160				
170				
180				
190				
200				
220				
225				
240				
250				
260				
280				
300				
320				
325				
340				
350				
360				
380				
400				
	200	200	200	200 ≥ 60 100
k	2,2	3	3,2	3,5
dk	9	12	13	14
Drive	TX10	TX20	TX20	TX25



ITEM 9250 A4 TX PAN WASHER HEAD TIMBER SCREWS WITH CUTTING POINT


USES:

Ideal for Outdoor screw connections such as solar equipment, car ports, balconies, steps, playground equipment, prefabricated houses and all supporting components

A minimum screw-in depth of 4x the diameter must be ensured. A screw-in depth of 8x the diameter should ideally be achieved. More than 12x the diameter must not be included in calculations.

FEATURES:

- Pan washer head timber screws
- cutting point
- Anti-Friction-coating
- TX drive

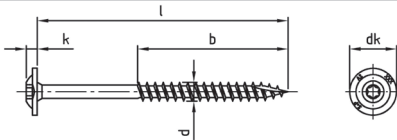

d	6	8	10
l/mm	Art. Nr. / Item no.	Art. Nr. / Item no.	Art. Nr. / Item no.
20			
25			
30	9250460 30/20	9250480 30	
35	9250460 35/24		
40	9250460 40/24	9250480 40	
45	9250460 45/30		
50	9250460 50/30	9250480 50	
55	9250460 55/36		
60	9250460 60/36	9250480 60/50	92504100 60/50
65	9250460 65/36		
70	9250460 70/42	9250480 70/50	92504100 70/55
80	9250460 80/48	9250480 80/72	92504100 80/55
90	9250460 90/54	9250480 90/80	92504100 90/55
100	9250460 100/70	9250480 100/80	92504100 100/55
110	9250460 110/70	9250480 110/80	92504100 110/80
120	9250460 120/70	9250480 120/80	92504100 120/80
130	9250460 130/70	9250480 130/80	92504100 130/80
140	9250460 140/70	9250480 140/80	92504100 140/80
150	9250460 150/70	9250480 150/80	92504100 150/80
160	9250460 160/70	9250480 160/80	92504100 160/80
170	9250460 170/70	9250480 170/80	92504100 170/80
180	9250460 180/70	9250480 180/80	92504100 180/105
190	9250460 190/70	9250480 190/80	92504100 190/105
200	9250460 200/70	9250480 200/80	92504100 200/105
220	9250460 220/70	9250480 220/80	92504100 220/105
225		9250480 225/80	
240	9250460 240/70	9250480 240/80	92504100 240/105
250		9250480 250/80	92504100 250/105
260	9250460 260/70	9250480 260/80	92504100 260/105
280	9250460 280/70	9250480 280/80	92504100 280/105
300	9250460 300/70	9250480 300/80	92504100 300/105
320		9250480 320/80	92504100 320/105
325		9250480 325/80	
340		9250480 340/80	92504100 340/105
350		9250480 350/80	92504100 350/105
360		9250480 360/80	92504100 360/105
380		9250480 380/80	92504100 380/105
400		9250480 400/80	92504100 400/105

	100 ≥ 200 50	100 ≥ 120 50	100 ≥ 120 50
k	3,8	4,6	5
dk	15	20	25
Drive	TX25	TX40	TX40